





ISO 9001 : 2008
IND/OM/NAB-2602/2311




QM 004, EM 016
OHSMA 004



CEPro ROOFING & PURLINS

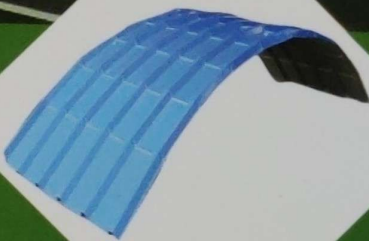

C Purlin



Z Purlin


www.cepro.co.in

Cepro Roofing : CEPro is a front line manufacturer of roofing and cladding profile sheets made out of galvalume and prepainted Galvanized iron and Non colour Galvalume iron, also offers complete roofing solutions, CEPro is a special design profile for stranger roofing applications its optimum pitch and depth ratio lends superior weight bearing capacity making it the profile of choice. Its unique design makes for a watertight roofing solutions with the added advantage of an anti-capillary groove which ensures a leak proof installation for years to come

Accessories : CEPro Roofing offers wide range of accessories and rain water systems to meet the customers expectation. The accessories are designed to take care of the purpose of clients and to meet the aesthetic appearance of the project. Accessories are also available in small, medium, heavy and customized sizes as per client requirements.

1

ROOFING SHEET DIMENSIONS

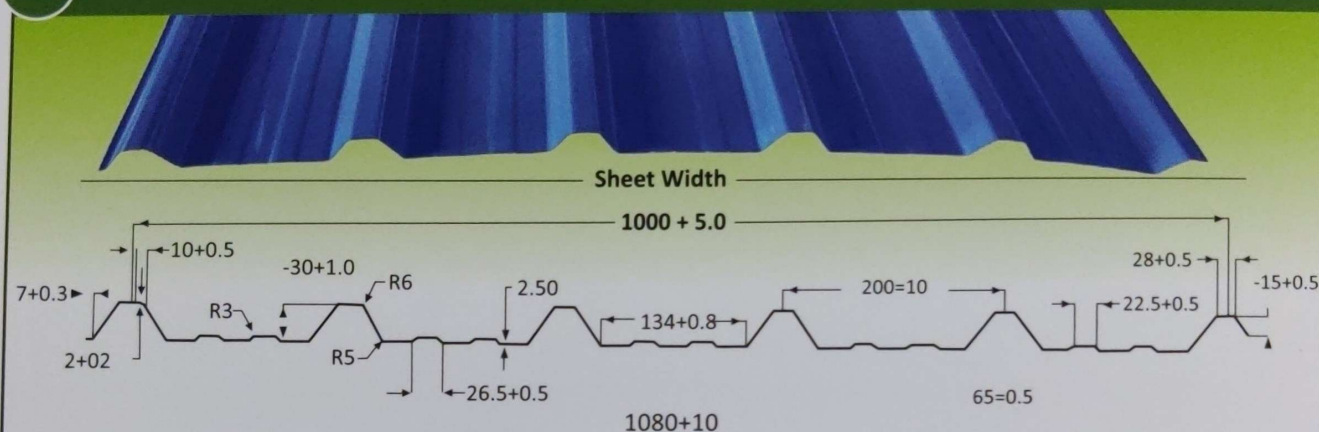

2

COLOUR COATED ALU-ZINE STEEL (GALVALUME)

(55% Aluminum 43% Zinc 1.6% Silicon)

Alu - Zinc Coating	AZ 150 GSM
Prime Service Coat	5 Microns Epoxy / PU on Both Sides
Paint Coating	Regular Modified Polyester (RMP) (Optional - Silicon Modified Polyester & PVF 2)
Painting Thickness (Top)	20 - 25 Microns
Painting Thickness (Bottom)	5 - 7 Microns
Surface Paint Reflection	Glass Finish (Optional - Matt Finish)
Conforms to	ASTM A755, JIS3323, Is277, AS1397
Tensile Strength - 345-550MPA, 550-700MPA	

3

COLOUR COATED ZINE STEEL (GALVANIZED)

Zinc Coating	Z 120 GSM
Prime Service Coat	5 Microns Epoxy / PU on Both Sides
Paint Coating	Regular Modified Polyester (RMP) (Optional - Silicon Modified Polyester & PVF 2)
Painting Thickness (Top)	18 - 20 Microns
Painting Thickness (Bottom)	5 - 7 Microns
Surface Paint Reflection	Glass Finish (Optional - Matt Finish)
Conforms to	ASTM A653, JIS3312, IS277, AS1397
Tensile Strength - 345-550MPA, 550-700MPA	

4

TECHNICAL SPECIFICATIONS OF ALUMINIUM ZINC ALLOY COATED STEEL

Combination	55% Aluminium 43.4% Zinc & 1.5% Silicon
Coating STD	As1397 - 1993
Material	BARE Galvalume - ASTM A792M
Coating Mass	AZ 150
Base Metal	HIGH Tensile Steel Sheet
Grade	80
Nominal thickness (TCT)	0.47 TCT & 0.5 TCT - AS/NZS - 1365 - 1996

About Us :

We, CEPro Building Systems Pvt. Ltd. are an eminent manufacturer of high quality Z Purlin, Hot Rolled Z Purlin, C & Z Purlin, and trader and supplier of Profile Sheet, G.C. Sheet, H.R. Sheet/Coil and C.R. Sheet / Coil. All our offered products are manufactured using high grade raw material that sourced from a reliable vendors. The use of excellent quality raw material makes our products strong and durable in nature. In this huge industry, there are several other enterprises that offer the same product range as ours, thus, we make sure to strive a step ahead of our competitors. This healthy competition in the market dictates us to ensure that all our products are of the highest quality that cater to the requirements of our clients. As a result, we have hired a separate team of expert quality testers, who check the quality of our products like Z Purlin, Hot Rolled Z Purlin, etc under several grounds.

Our company possesses a huge infrastructure, which we have installed with latest machines and equipment that are known for their outstanding efficiency. Further, we have all the modern facilities in our manufacturing unit that allows us to carry our operations in a hassle - free manner. All the operations are carried under the able leadership of our mentor

Our vision is to continue our development by manufacturing and supplying our clients an excellent quality assortment of Z shaped Purlin. Our professionals manufacture these purlins by procuring high quality materials from our reliable vendor base. Offered in various lengths and thicknesses, our Z Shaped Purlin is extensively used in large sized roofing, like workshops, warehouses, cold storages, godowns and industrial sheds. Our purlins are acknowledged over the global platform by clients for their attributes like light weight, high structural strength and rust proof finish.

5

'C' Purlin

Specifications:




Thickness	: 1.5 mm to 3.15 mm
Web	: 100 mm to 300 mm
Flanz	: 50 to 90 mm
Lip	: 15 to 25 mm
Lenth	: upto 12 Mtrs
Raw Material	: Z120 GSM, IS277/IS513
Yield strength	: 245 Mpa to 345 Mpa

6

'Z' Purlin

Specifications:





Thickness	: 1.5 mm to 3.15 mm
Web	: 100 mm to 300 mm
Flanz	: 45 to 100 mm
Lip	: 15 to 25 mm
Lenth	: upto 12 Mtrs
Raw Material	: Z120 GSM, IS277/IS513
Yield strength	: 245 Mpa to 345 Mpa

Advantages of C & Z purlins :

- Very high strength-to-weight ratio : high strength - low cost.
- More than 40% saving in overall construction cost
- More then 30% saving in overall construction cost.
- Easy low-cost handling and transportation
- Economy due to reduction in dead weight on the main frame structure
- Significantly reduces installation time.
- Ability to span long lengths
- No site Drilling or cutting required
- Maintenance free owing to application of proper surface finishing
- Purlins are factory finished, cut to exact lengthe with Pre-Punched holes to avoid wastage of time and material
- Continuous supply and placing for better structural strength, stability and economy

7

STANDARD ACCESSORIES

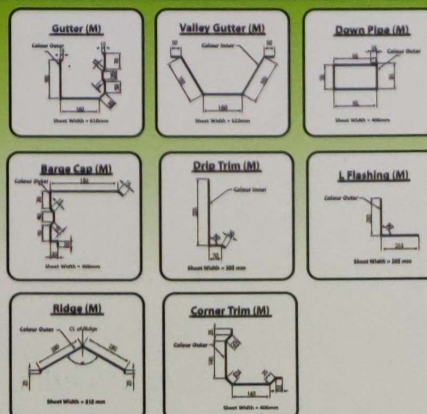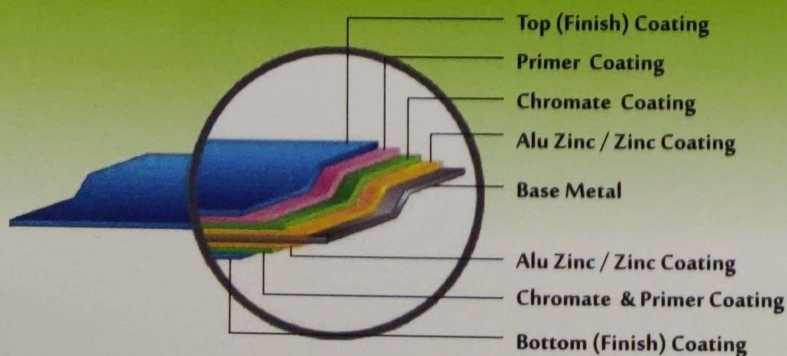



AVAILABLE COLOURS



Royal Blue



Terracota Red



Torques Blue



Mist Green




Sky Blue



Brick Red



Tourrus Blue



Off White



NCGL

8

NOTE :

Please refer to the colour card with your CEPro Roofing representative accurate colour reference. Actual Colours may vary from those shown here in, and they are also subject to marginal variation from batch to batch. Standard bottom colour is Grey or Light Grey.

Please refer to the color Colour is Grey or Light Grey

CEPro Building Systems (P) Ltd.

Corporate Office :

H.No. 8-3-191/82/1 (81A), 1st Floor, Ananda Nilayam, Vengal Rao Nagar Colony, S.R. Nagar, Hyderabad-500 038. T.S. India. Ph : 9140- 23808888, E-mail : sales@cepro.co.in, www.cepro.co.in

Works :

Plot No. 89/B, IDA, Phase -I, Jeedimetla, Hyderabad, Telangana - 500 055